

## 3869-00


### Stainless steel eye-/facewash, floor mounted

Each spray head has an internal flow control and filter to remove impurities. Operated by a push plate, stay-open ball valve. The eye/facewash is self-draining. Delivered with collecting bowl in powder-coated stainless steel, pipes in stainless steel with green/ white stripes, and a stainless steel valve. The water supply should be designed for a minimal flow of 28 l/min at a pressure of 2,4 bar.

Emergency signs are enclosed with each safety station.  
The product is also available in galvanised steel: 3869

#### TECHNICAL INFORMATION

Flow rate: 28 L/min	Width: 380 mm
Water supply: 1/2" female	Height: 1100 mm
Drain: 1" female	Depth: 288 mm

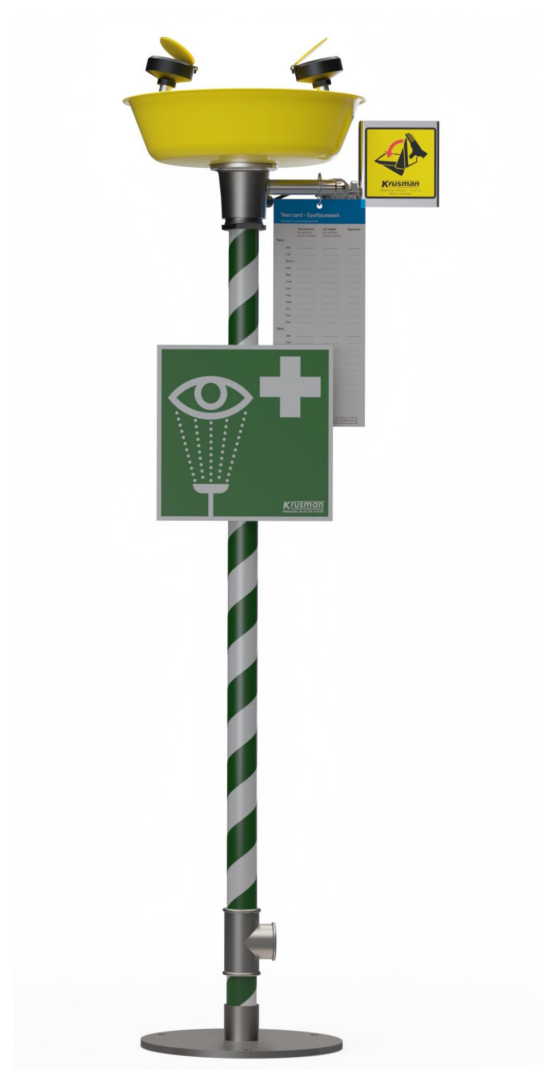

Manufactured in accordance to ANSI Norm Z358.1- latest edition and EN 15154- latest edition.