

3870-00


Stainless steel eyewash, floor mounted

Each spray head has an internal flow control and filter to remove impurities. Operated by a push plate, stay-open ball valve. The eye/facewash is self-draining. Delivered with collecting bowl in powder-coated stainless steel, pipes in stainless steel with green/ white stripes, and a stainless steel valve. The water supply should be designed for a minimal flow of 14 l/min at a pressure of 2,4 bar.

Emergency signs are enclosed with each safety station.
The product is also available in galvanised steel: 3870

TECHNICAL INFORMATION

| | |
|---------------------------|-----------------|
| Flow rate: 14 L/min | Width: 380 mm |
| Water supply: 1/2" female | Height: 1100 mm |
| Drain: 1" female | Depth: 288 mm |

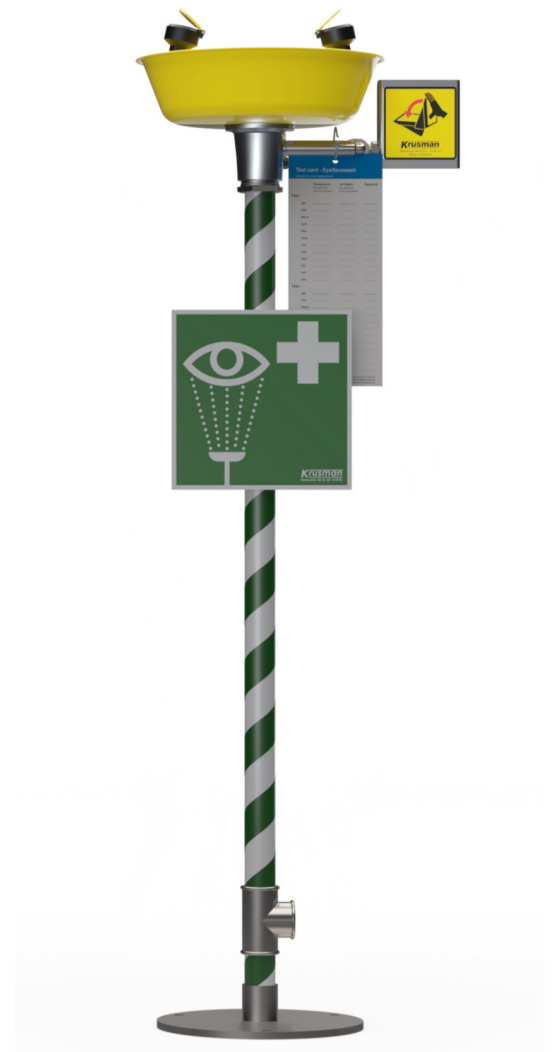

Manufactured in accordance to ANSI Norm Z358.1-
latest edition and EN 15154- latest edition.