

## 3870


### Eyewash, floor mounted

Each spray head has an internal flow control and filter to remove impurities. Operated by a push plate, stay-open ball valve. The eye/facewash is self-draining. Delivered with collecting bowl in powder-coated stainless steel, pipes in galvanised steel with green/ white stripes, and a brass valve. The water supply should be designed for a minimal flow of 14 l/min at a pressure of 2,4 bar.

Emergency signs are enclosed with each safety station.  
The product is also available in stainless steel: 3870-00

#### TECHNICAL INFORMATION

Flow rate: 14 L/min	Width: 380 mm
Water supply: 1/2" female	Height: 1100 mm
Drain: 1" female	Depth: 288 mm

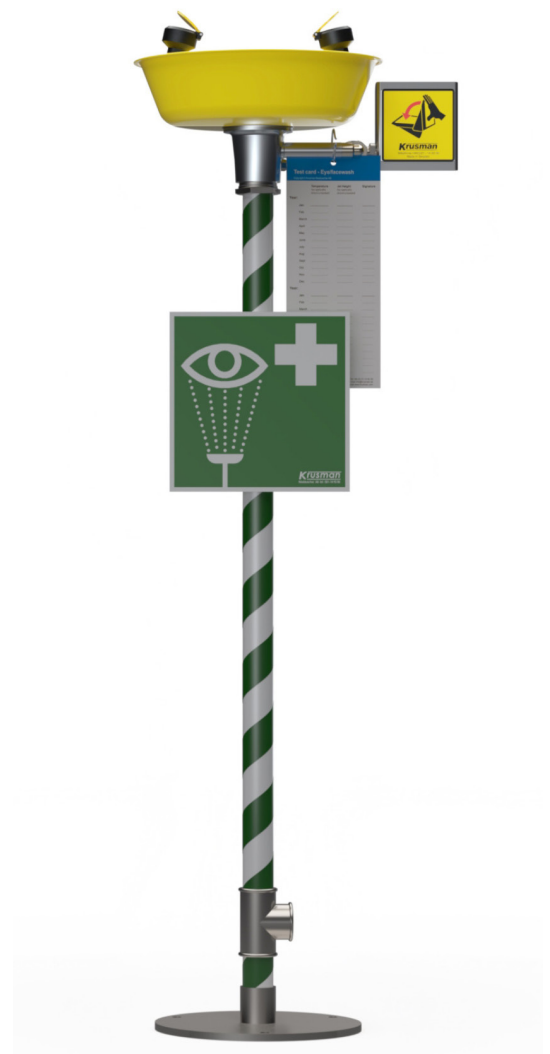

Manufactured in accordance to ANSI Norm Z358.1- latest edition and EN 15154- latest edition.